


フィールドクリップ用ホース金具

金具形状

SSF90

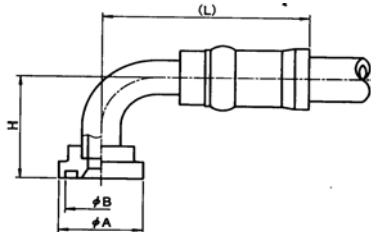

【特徴】


SAE J518 CODE61
標準圧力シリーズ
90°エルボ

ホース内径	金具品番	金具の特徴					その他
		口金サイズ	A	B	L	H	
12	KKCSSF90 12	-08	30.2	25.5	73	41.5	
	KKCSSF90 -1208	-12	38.1	31.8	73	42.5	
	KKCSSF90 12A A A	-08	30.2	25.5	73	90	
	KKCSSF90 12A A B	-08	30.2	25.5	72.5	130.5	
	KKCSSF90 12A A C	-12	38.1	31.8	73	54	
	KKCSSF90 12A A D	-16	44.5	39.7	86	53.5	
	KKCSSF90 12A A E	-16	44.5	39.7	84.5	46.5	
	KKCSSF90 12A A F	-08	30.2	25.5	84.5	130.5	パイプ外径 17.3
	KKCSSF90 12A A G	-08	30.2	25.5	84.5	90	パイプ外径 17.3
	KKCSSF90 12A A H	-08	30.2	25.5	73.5	120	
	KKCSSF90 12A A J	-08	30.2	25.5	80	90	12AAAのYTA2400加締不可対応品
	KKCSSF90 12A A K	-08	30.2	25.5	84.5	120	
	KKCSSF90 12ABA	-08	30.2	25.5	84.5	60	
	KKCSSF90 12ABB	-12	38.1	31.8	84	90	パイプ外径 21.7
GHCSSF90 12	-08	30.2	25.5	72.5	41		
15	GKCSSF90 -0810	-08	30.2	25.5	87	41.5	
	GKCSSF90 -1210	-12	38.1	31.8	98	53.5	
	GKCSSF90 15A A A	-08	30.2	25.5	86.5	130.5	
	GKCSSF90 15A A B	-16	44.5	39.7	98	53.5	
	GKCSSF90 15A A C	-12	38.1		98	53.5	オリック溝無し
	GKCSSF90 15A A D	-08	30.2	25.5	106.5	50	パイプ外径 19
	GKCSSF90 15A A E	-08	30.2	25.5	86.5	150.5	
	GKCSSF90 15A A F	-12	38.1	31.8	96	100	
	GKCSSF90 15A A G	-12	38.1	31.8	108	150	
	GKCSSF90 15A A H	-12	38.1	31.8	96	120	
	GKCSSF90 15AAJ	-08	30.2	25.5	98	150	
	GKCSSF90 15AAK	-08	30.2	25.5	86.5	135	
	GKCSSF90 15ABA	-08	30.2	25.5	98	100	
	19	GKCSSF90 19	-12	38.1	31.8	104.5	53.5
GKCSSF90 19J		-12	38.1	31.8	104.5	53.5	
GKCSSF90 -0812		-08	30.2	25.5	93.5	41.5	
GKCSSF90 -1612		-16	44.5	39.7	104.5	53.5	
GKCSSF90 19A A A		-12	38.1	31.8	114.5	95.5	
GKCSSF90 19A A B		-12	38.1	31.8	102.5	150	
GKCSSF90 19A A C		-12	38.1	31.8	102.5	105	
GKCSSF90 19A A D		-16	44.5	39.7	102.5	105	
GKCSSF90 19A A E		-20	50.8	44.5	103	67	NP仕様とOKK仕様があり注意
GKCSSF90 19A A F		-08	30.2	25.5	93.5	65	
GKCSSF90 19A A G		-08	30.2	25.5	93	130.5	
GKCSSF90 19A A H		-16	44.5	39.7	103	61	
GKCSSF90 19A A I		-12	38.1	31.8	103	85	
GKCSSF90 19A A J		-12	38.1	31.8	103	75	
GKCSSF90 19A A K		-08	30.2	25.5	93	130	GKCSSF90 19AAGとダブリ
GKCSSF90 19A B A		-08	30.2	25.5	93	150.5	
GKCSSF90 19A B B		-12	38.1	31.8	120	200	FT1307の場合金具逆挿入
GKCSSF90 19A B C		-08	30.2	25.5	93.5	89	
GKCSSF90 19A B D		-16	44.5	39.7	102.5	150	
GKCSSF90 19A B E		-08	30.2	25.5	105	130.5	パイプ外径 17.3
GKCSSF90 19A B F		-20	50.8	44.5	112.5	60.5	
GKCSSF90 19A B G		-12	38.1	31.8	102.5	100	
GKCSSF90 19A B H		-12	38.1	31.8	114.5	127	
GKCSSF90 19A B J		-08	30.2	25.5	105	95.5	パイプ外径 17.3
GKCSSF90 19A B K		-12	38.1	31.8	102.5	120	
GKCSSF90 19ACA		-20	50.8	44.5	113	110	
GKCSSF90 19ACB		-08	30.2	25.5	105	65	
GKCSSF90 19ACC		-24	60.3	53.9	112.5	60.5	
GKCSSF90 19ACD	-12	38.1	31.8	102.5	175		
GKCSSF90 19ACE	-20	50.8	44.5	103	67		
GHCSSF90 19	-12	38.1	31.8	105	55		

フィールドクランプ用ホース金具

金具形状

SSF90

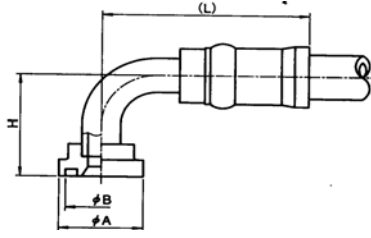

【特徴】


SAE J518 CODE61
標準圧力シリーズ
90°エルボ

ホース内径	金具品番	金具の特徴					その他
		口金サイズ	A	B	L	H	
	GHCSSF90 -1612	-16	44.5	39.7	104.5	53.5	
	GFCSSF90 19	-12	38.1	31.8	105	55	
	GFCSSF90 19AAC	-12	38.1	31.8	102.5	105	
	GJCSSF90 19	-12	38.1	31.8	105	55	
25	GKCSSF90 25	-16	44.5	39.7	117.5	60.5	
	GKCSSF90 25J	-16	44.5	39.7	117.5	60.5	
	GKCSSF90 -1216	-12	38.1	31.8	111.5	53.5	
	GKCSSF90 -2016	-20	50.8	44.5	117.5	60.5	
	GKCSSF90 25 A A	-12	38.1	31.8	109.5	115	
	GKCSSF90 25 A A B	-16	44.5	39.7	120	100	
	GKCSSF90 25 A A C	-12	38.1	31.8	109.5	150	
	GKCSSF90 25 A A D	-16	44.5	39.7	312	70	
	GKCSSF90 25 A A E	-20	50.8	44.5	118	67	
	GKCSSF90 25 A A F	-16	44.5	39.7	118	110	
	GKCSSF90 25 A A G	-16	44.5	39.7	118	85	
	GKCSSF90 25 A A H	-16	44.5	39.7	118	150	
	GKCSSF90 25 A A J	-12	38.1	31.8	131	150	ハワ径 27.2
	GKCSSF90 25 A A K	-12	38.1	31.8	121.5	127	
	GKCSSF90 25 A B A	-16	44.5	39.7	118	165	
	GKCSSF90 25 A B B	-16	44.5	39.7	118	120	
	GKCSSF90 25 A B C	-16	44.5	39.7	140	210	
	GKCSSF90 25 A B D	-20	50.8	44.5	118	120	
	GKCSSF90 25 A B E	-12	38.1	31.8	110	61	
	GKCSSF90 25 A B F	-16	44.5	39.7	232	330	
	GKCSSF90 25ABG	-16	44.5	39.7	117.5	130	
	GKCSSF90 25ABJ	-24	60.3	53.9	130	152	
	GKCSSF90 25ABK	-12	38.1	31.8	109.5	85	
	GKCSSF90 25ACA	-16	44.5	39.7	117.5	140	
	GHCSSF90 25 A B H	-24	60.3	53.9	232	68.5	
GHCSSF90 25ABK	-12	38.1	31.8	109.5	85	2004.11.18	
GFCSSF90 25	-16	44.5	39.7	121.5	61.0		
GFCSSF90 25ABA	-16	44.5	39.7	118	165		
GJCSSF90 25	-16	44.5	39.7	121.5	65		
GJCSSF90 25AAJ	-12	38.1	31.8	131	150		
32	GKCSSF90 32	-20	50.8	44.5	145	66.5	
	GKCSSF90 -1620	-16	44.5	39.7	135.5	60.5	
	GKCSSF90 -2420	-24	60.3	53.9	145	68.5	
	GKCSSF90 32 A A	-24	60.3	53.9	145	80	
	GKCSSF90 32 A A B	-16	44.5	39.7	200	330	
	GKCSSF90 32 A A C	-20	50.8	44.5	200	330	
	GKCSSF90 32 A A D	-16	44.5	39.7	158	215	
	GKCSSF90 32 A A E	-20	50.8	44.5	145	200	
	GKCSSF90 32 A A F	-20	50.8	44.5	145	130	
	KKCSSF90 32	-20	50.8	44.5	145	66.5	
	KKCSSF90 -1620	-16	44.5	39.7	135.5	60.5	
	KKCSSF90 32AAA	24	60.3	53.9	145	80	
	KKCSSF90 32 A A B	-16	44.5	39.7	200	330	
	KKCSSF90 32 A A C	-20	50.8	44.5	200	330	
	KKCSSF90 32 A A D	-16	44.5	39.7	158	215	
	KKCSSF90 32 A A E	-20	50.8	44.5	145	200	
	KKCSSF90 32 A A F	-20	50.8	44.5	145	130	
	GNCSSF90 32	-20	50.8	44.5	133.5	66.5	
	GNCSSF90 -2420	-24	60.3	53.9	131.5	68.5	
	GNCSSF90 -1620	-16	44.5	39.7	122	60.5	

フィールドクリップ用ホース金具

金具形状

SSF90

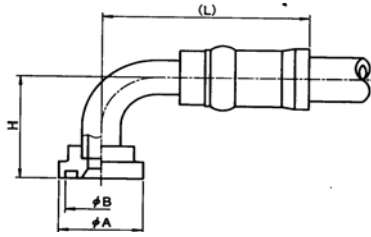

【特徴】
SAE J518 CODE61
標準圧カシリーズ
90°エルボ

ホース内径	金具品番	金具の特徴					その他
		口金サイズ	A	B	L	H	
38	GKCSSF90 38	-24	60.3	53.9	182	80	
	GKCSSF90 -2024	-20	50.8	44.5	165	66.5	
	GKCSSF90 38A A A	-20	50.8	44.5	165	110	
	GKCSSF90 38A A B	-24	60.3	53.9	182	150	
	GKCSSF90 38AAC	-20	50.8	44.5	165	150	
	AKCSSF90 38	-24	60.3	53.9	182	80	
	AKCSSF90 38AAA	-24	60.3	53.9	185	92	
	GNCSSF90 38	-24	60.3	53.9	156.5	80	
	GNCSSF90 -2024	20	50.8	44.5	137.5	66.5	
50	GKCSSF90 50	-32	71.4	63.4	224	115	
	KKCSSF90 50	-32	71.4	63.4	224	115	
	GNCSSF90 50	-32	71.4	63.5	191.5	115	